




ROSTFREI  
Rost  
frei  
Inox  
Stainless  
Steel

**4 Type**

- A** without sealing
- B** with sealing

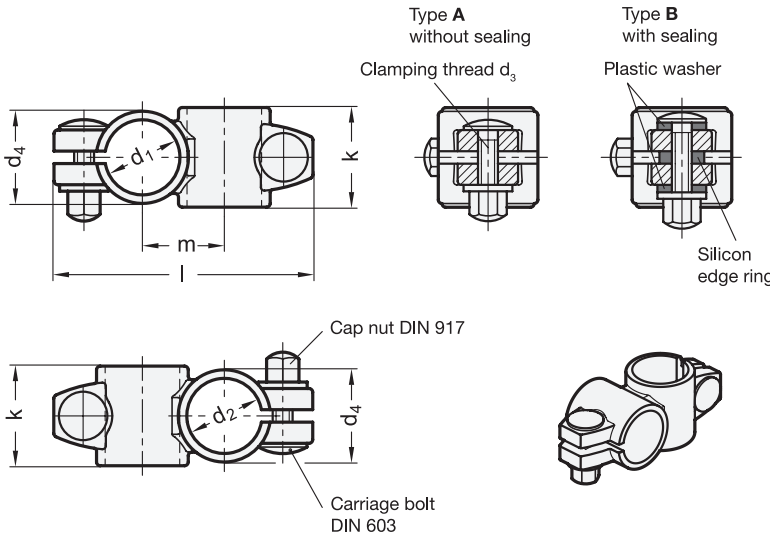

1

2

3

d <sub>1</sub> Bore B	d <sub>2</sub> Bore B	k Clamping length	d <sub>3</sub> Clamping thread	d <sub>4</sub>	Length l	m
B 30	B 30	40	M 8	37	104	33
B 50	B 50	65	M 10	60	150	53

**Specification**

- Stainless Steel
  - AISI CF-8
  - matt shot-blasted
- Clamping bores mechanically machined
- Carriage bolt DIN 603 Stainless Steel A2
- Cap nuts DIN 917 Stainless Steel A2
- Sealings
  - Washers Plastic (Polyacetal POM)
  - Edge ring Silicon, 40 ... 60 Shore A
- *Stainless Steel characteristics* → Page 1489
- *Plastic characteristics* → Page 1483
- RoHS-konform

**Information**

The clamping bores of GN 132.5 Stainless Steel-Two-way connector clamps are mechanically machined and designed for construction tubings GN 990 or DIN 2391, DIN 2395 and DIN 2462 respectively.

The shape of the clamping screws / nuts prevents the formation of wetness due to dammed-up water. The designs with sealing (Type B) also seals bore holes and threads.

see also...

- *Stainless Steel-Construction tubes GN 990* → Page 1277

How to order

1	d <sub>1</sub>
2	d <sub>2</sub>
3	k
4	Type

GN 132.5-B30-B30-40-A