

d₁ Ø Insert	d₂ Thread	d₃ H7 Bore with Keyway	s₁ Square V	s₂ Hexagon SK	b	d₄	d₅	h	Length l	max. torque in Nm			
12	M 8	-	V 8	-	22	9	20	11	118	40			
17	M 10	M 12	K 10	K 12	V 10	-	SK 12*	30	11	26	14	156	70
22	M 14*	M 16	K 14	K 16	V 12	V 14	SK 14*	39,5	14	33	17	187	130
26	M 20	-	K 18	-	V 17	-	SK 17*	46	17	33	22	219	180

* not available from stock, requires a minimum order quantity.

Specification

- Housing
Steel
plastic coated
black matt, textured finish
- Shaft
Stainless Steel AISI 303
matt shot-blasted
- Wearing parts
Steel, hardened
- Domes gear knobs GN 719.1
Plastic, Duroplast
black, shiny finish
- Square DIN 79 → Page 1126
- ISO-Fundamental Tolerances → Page 1132
- Stainless Steel characteristics → Page 1144
- RoHS compliant

On request

- other inserts

Information

Ratchet spanners GN 316 are well designed of robust construction and simple to use.

To exchange the inserts remove screw and cover. They are, however, also practical for fixed applications on any machinery and equipment. For example for assembly and repair work. The inserts are easily interchanged and can be supplied individually.


How to order

GN 316-26-V17

1	d₁
2	s₁ (s₂, d₂, d₃)



1.1
1.2
1.3
1.4
1.5

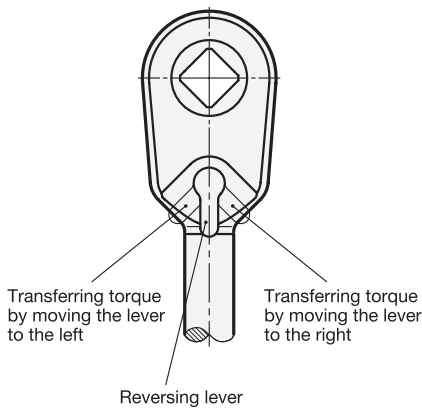

1.6
1.7
1.8
1.9

Function

In order to reverse the operation of this spanner move the cam lever from its middle position either to the left or the right to obtain the function required.

In the middle position the ratchet function is eliminated and the spanner can be used in both directions as an ordinary spanner.

