


Type A



Type E

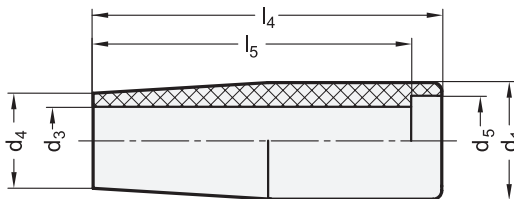

elesa

ELESA original design I.281/I.281+x-SST



**4 Type**

- A** with threaded bolt
- E** without threaded bolt

<b>2</b>	<b>3</b>	<b>3</b>	<b>3</b>	<b>3</b>	<b>3</b>	<b>3</b>	<b>3</b>	<b>3</b>	<b>3</b>	<b>3</b>	<b>3</b>	<b>3</b>
d <sub>1</sub>	d <sub>2</sub> 6g Type A	-	d <sub>3</sub> <sup>+0.3</sup> / <sub>+0.1</sub> Type E	d <sub>4</sub>	d <sub>5</sub>	l <sub>1</sub>	l <sub>2</sub>	l <sub>3</sub>	l <sub>4</sub>	l <sub>5</sub>	A/F	
18	M 6	-	8	15	12	40	13	0,3	39	35	4	
21	M 8	-	10	17	14	50	15	0,5	49	43	5	
23	M 8	M 10	12	19	16	65	17	0,5	64	56	6	
26	M 10	-	13	21	17	80	18	0,5	79	70	6	
28	M 10	-	14	22	19	90	18	0,5	89	79	8	
31	M 12	-	16	25	20	102	20	1	100	89	8	

**Specification**

- Plastic  
Duroplast (Phenolic PF)  
- temperature resistant up to 110 °C  
- black, shiny finish
- Threaded bolt  
Stainless Steel AISI 304
- *Plastic characteristics* → Page 1483
- *Stainless Steel characteristics* → Page 1489
- **RoHS compliant**



**KU**

**Information**

The outstanding feature of revolving handles GN 598.2 is their highly robust design. Type E is suitable for use in connection with user-specific threaded bolts.

see also...

- *Revolving handles GN 598.1 (Spindle Stainless Steel)* → Page 36

How to order (with threaded bolt)

**1** **2** **3** **4**  
GN 598.2-KU-31-M12-A

<b>1</b>	<b>Material</b>
<b>2</b>	d <sub>1</sub>
<b>3</b>	d <sub>2</sub>
<b>4</b>	Type

How to order (without threaded bolt)

**1** **2** **3** **4**  
GN 598.2-KU-26-13-E

<b>1</b>	<b>Material</b>
<b>2</b>	d <sub>1</sub>
<b>3</b>	d <sub>3</sub>
<b>4</b>	Type