


Bore for socket cap screw  
DIN 912-M5 / M6

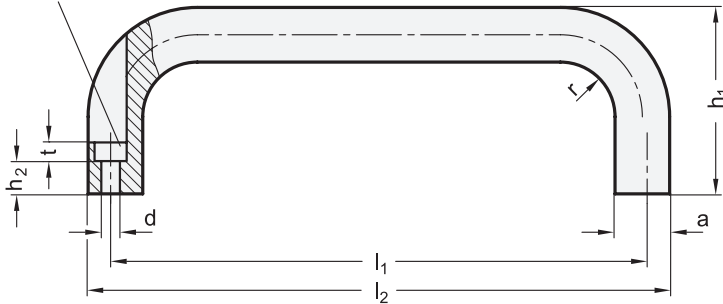

1

2

b	$l_1 \pm 0,25$	a	d	$h_1$	$h_2$	$l_2$	r	t
20	100	13	5,4	49	13,5	112	13	5,5
20	112	13	5,4	49	13,5	124	13	5,5
20	120	13	5,4	51	13,5	132	13	5,5
20	128	13	5,4	51	13,5	140	13	5,5
20	160	13	5,4	51	13,5	172	13	5,5
26	116	17	6,4	55	11	130	17	6
26	120	17	6,4	55	11	134	17	6
26	132	17	6,4	55	11	146	17	6
26	164	17	6,4	57	11	178	17	6
26	179	17	6,4	57	11	193	17	6
26	196	17	6,4	57	11	210	17	6

Specification

- Aluminum
  - plastic coated
  - black, RAL 9005, textured finish
  - black, RAL 9005, textured finish UV-resistant
  - red, RAL 3000, textured finish
  - silver, RAL 9006, textured finish
  - anodized, natural color
  - blank
  - blank tumbled

- SW
- SWU
- RS
- SR
- EL
- BL

• Load rating information → Page 1455 ff.

• RoHS compliant

3

Information

GN 565.1 cabinet „U“ handles are made from a bent aluminum profile and have excellent stability and ergonomic design. Due to the production process, special designs can be supplied even in relatively small quantities. In addition to the standard surfaces, these cabinet „U“ handles are also available with a functional coating.

The **SWU** version is coated with a highly weather-resistant and UV-protective powder coating system, making this version excellent for outdoor use.

see also...

- Stainless Steel-Cabinet „U“ handles GN 565.5 (Mounting from the back or the operator's side) → Page 82
- Assembly sets for profile systems 30 / 40 GN 965 → Page 1428
- Assembly sets for profile systems 30 / 40 / 45 GN 968 → Page 1438

How to order

GN 565.1-26-132-SW

1	b
2	$l_1$
3	Finish

