



Type A

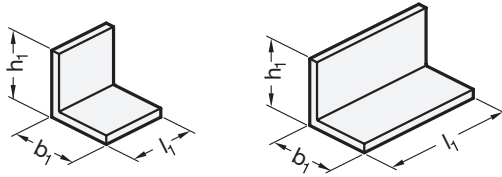

Type B

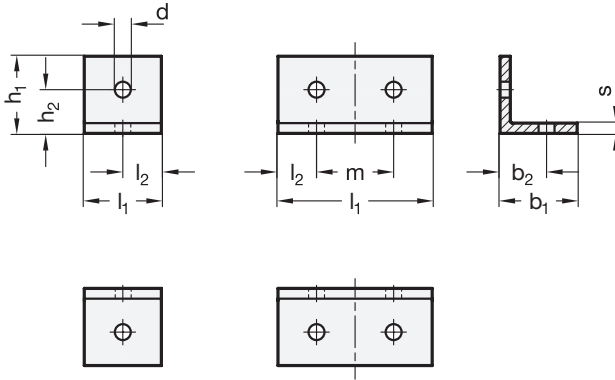

**5 Type**

- A without bores
- B with bores

<sup>2</sup> h <sub>1</sub>	<sup>3</sup> b <sub>1</sub>	<sup>4</sup> l <sub>1</sub>	b <sub>2</sub>	d	h <sub>2</sub>	l <sub>2</sub>	m	s
30	30	30	18	6,2	18	15	-	4
30	30	60	18	6,2	18	15	30	4
40	40	40	24	8,2	24	20	-	5
40	40	80	24	8,2	24	20	40	5
50*	50	50	30	10,2	30	25	-	6
50*	50	100	30	10,2	30	25	50	6

\* only available in version ALM

**Specification**

- Structural Steel drawn, with sharp edges blackened
- Aluminum pressed matt, ground
- RoHS compliant



**Information**

**STB**

GN 970 installation brackets are used universally for right-angle connecting and fastening of, e.g. base plates or covers.

**ALM**

Type A allows for the use of drilling templates specific to the application as well as fastening by welding.

Type B installation brackets have 2 or 4 holes depending on the length l<sub>1</sub>.

see also...

- Angle pieces, Shackles GN 967 → Page 1272

How to order

1	Material
2	h <sub>1</sub>
3	b <sub>1</sub>
4	l <sub>1</sub>
5	Type

**GN970-STB-40-40-80-A**